


TY266/GRP01 - ZS2411 - QT2R

Datasheet

D.C. Neutral reed follower relay

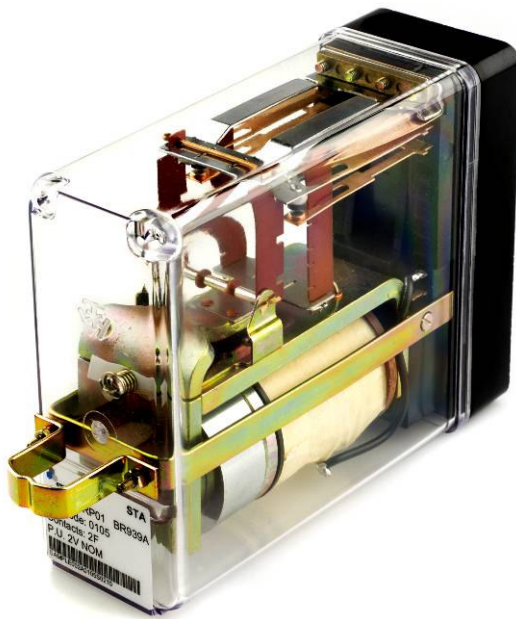

Description

The relay covered by this data sheet is a direct replacement for GEC's ZS2411 which is designed for use in the reed receiver amplifier circuit on RR 2002 and RR 2003 units.


Mors Smitt Relays

- Modular plug in design
- Non weld contacts
- Silver and carbon impregnated with silver contact tips
- Proven reliability
- Low life cycle cost

Specification	ZS2411
Network Rail Acceptance Number	PA05/04802
Pin Code (Pins)	133 (B, C, D, F & H)
Contacts	6F 3B
Rated Voltage	12V D.C.
Mors Smitt Reference (Westinghouse Reference)	ST2R (QT2R)
Mors Smitt Catalogue Number	TY266/GRP01

Weight	1.7 kg
Contact Resistance	0.2 Ω
Contact Rating	3 A
Release	5.7 V
Full Operate	8.8 V
Power Consumption	0.4 W
Coil Resistance	440 Ω
Mors Smitt Catalogue Number	TY266/GRP01

Contact Arrangements.

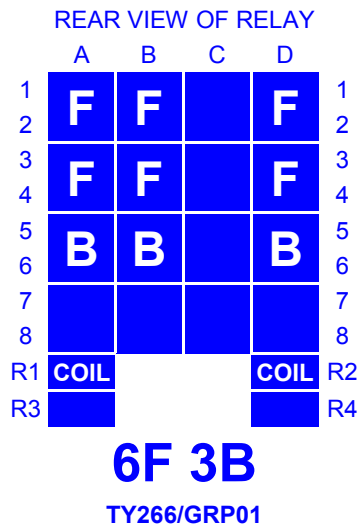

F = Front contact, which is made when the relay is energised. This is a normally open contact.

B = Back contact, which is made when the relay is de-energised and the armature has completed its maximum travel. This is a normally closed contact.

Note. Terminations R3 and R4 are linked together inside the relay



MS Relais SAS

Tour Rosny 2, Avenue du Général de Gaulle,
F - 93118 Rosny-sous-Bois Cedex, FRANCE
T +33 (0)1 4812 1440, F +33 (0)1 4855 9001
E sales@msrelais.com

Mors Smitt Asia Ltd.

807, Billion Trade Centre, 31 Hung To Road
Kwun Tong, Kowloon, HONG KONG SAR
T +852 2343 5555, F +852 2343 6555
E info@morssmitt.hk

Nieaf-Smitt B.V.

Vrieslantlaan 6, 3526 AA Utrecht,
NETHERLANDS
T +31 (0)30 288 1311, F +31 (0)30 289 8816
E sales@nieaf-smitt.nl

Mors Smitt Technologies Inc.

420 Sackett Point Road
North Haven, CT 06473, USA
T +1 (203) 287 8858, F +1 (888) 287 8852
E mstechnologies@msrelais.com

Mors Smitt UK Ltd.

Doulton Road, Cradley Heath
West Midlands, B64 5QB, UK
T +44 (0)1384 567 755, F +44 (0)1384 567 710
E info@morssmitt.co.uk