



Connector 48 pins sideways

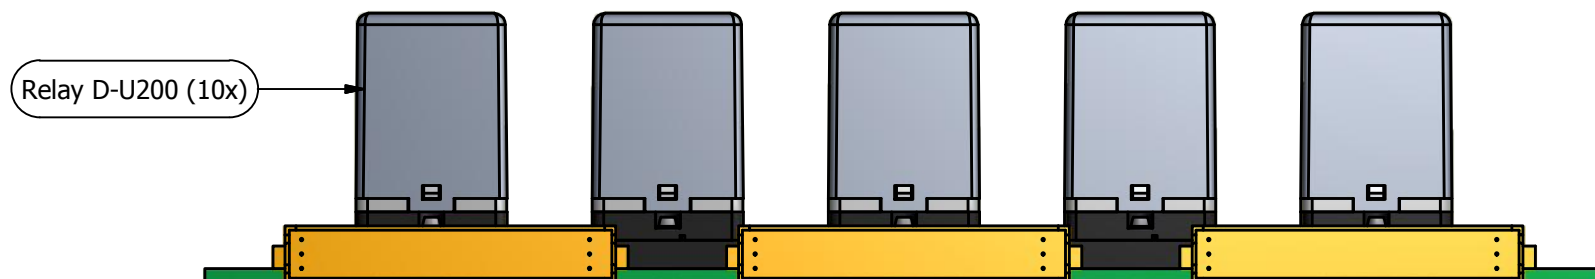

Relay D-U200 (10x)

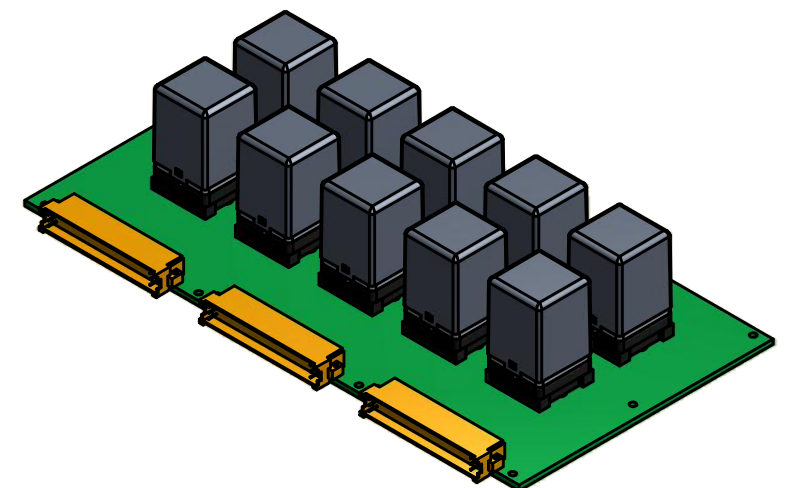

Remarks:

- All relay coils and contacts are one by one linked via PCB tracks to the connectors.
- Double Layer Printed Circuit Board
- PCB thickness 3,2 mm, copper 70 um
- Solder Mask Colour, green
- Lead-Free HAL finish
- Maximum current 1A
- Assembly conform IPC-A-610 Class 2
- Optional: Splitter connector for jumper connection between relays. See page 3.

GEN. TOL.: ±	LINEAR ±	ANGLE ±	HOLES ±	DIMENSIONS IN: mm	SOURCE FILE: 617001322.idw	SHEET 1 OF 7	SCALE: 1:2	DRAWN BY: NB	CHECKED: TR	REVISION DATE: 10-06-2013
Budget PCB 10 relays module									THIRD ANGLE PROJECTION	SIZE A3
PROPERTY OF MORS SMITT BV UTRECHT - THE NETHERLANDS. DISCLOSURE TO THIRD PARTIES OR COPYING/ REPRODUCTION IN ANY FORM WHATSOEVER, IS NOT PERMITTED WITHOUT THE WRITTEN PERMISSION OF THE OWNER										