

UB 200 relay - Voltage monitoring

Datasheet



Description

The voltage monitoring relay UB 200 opens auxiliary loads circuits when battery voltage becomes too low and puts them back in service when battery voltage recovers. A time delay of several seconds (to be defined) engages before opening a load circuit and a time delay of several seconds (to be defined) before putting back in service a load.

The plug-in design offers secure locking feature for maximum ease of maintenance (no wires need to be disconnected or other hardware removed for relay inspection or replacement). The resistance to impact and vibration is conform to standards in force for Railway Transported Equipment.

Positive mechanical keying of relay to socket is built into relay and socket during manufacture and terminal identifications are clearly marked on identification plate that is permanently attached to the relay.

The UB 200 relay is pluggable in the following sockets: EA 102 B, EA 102 BF, EA 103 BF, EA 104 B, EA 104 BF, EA 105 BF, EA 112 BF.

Application

The UB 200 relay is designed for voltage level sensing and used for example to monitor the battery load shedding.

Features

- Voltage monitoring relay – 1 voltage level
- 2 C/O contacts, form Z
- Plug-in design with secure locking feature for maximum ease of maintenance
- -40 °C...+85 °C operating temperature

Benefits

- Proven reliable
- Long life cycle
- Easy to maintain and replace
- Low life cycle cost
- No maintenance

Railway compliancy

- NF F 62-002 Rolling stock - Instantaneous relays contacts and sockets
- NF F 16-101/102 Fire behaviour - Railway rolling stock
- EN 50155 Railway application - Electronic equipment used on rolling stock
- IEC 61373 Railway application - shock and vibration tests





UB 200 relay

Technical specifications



Functional and connection diagrams

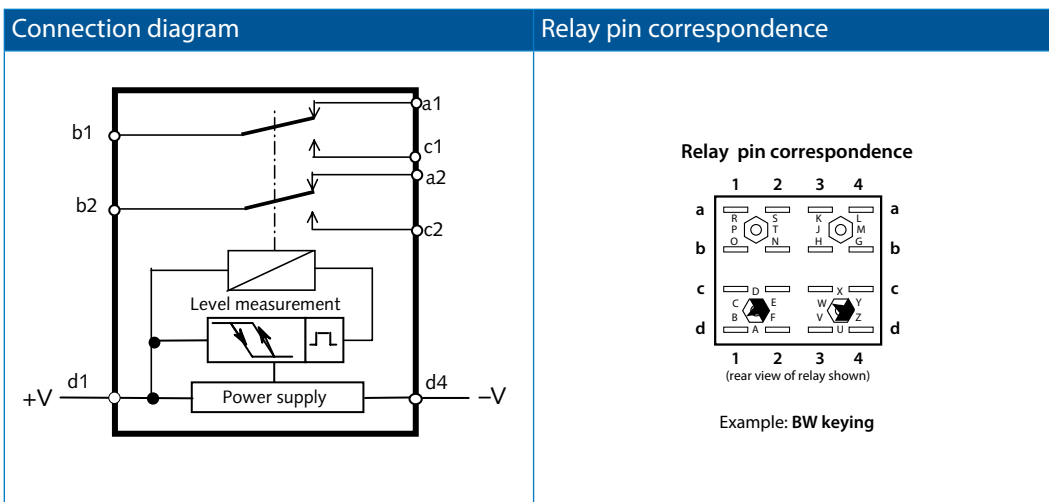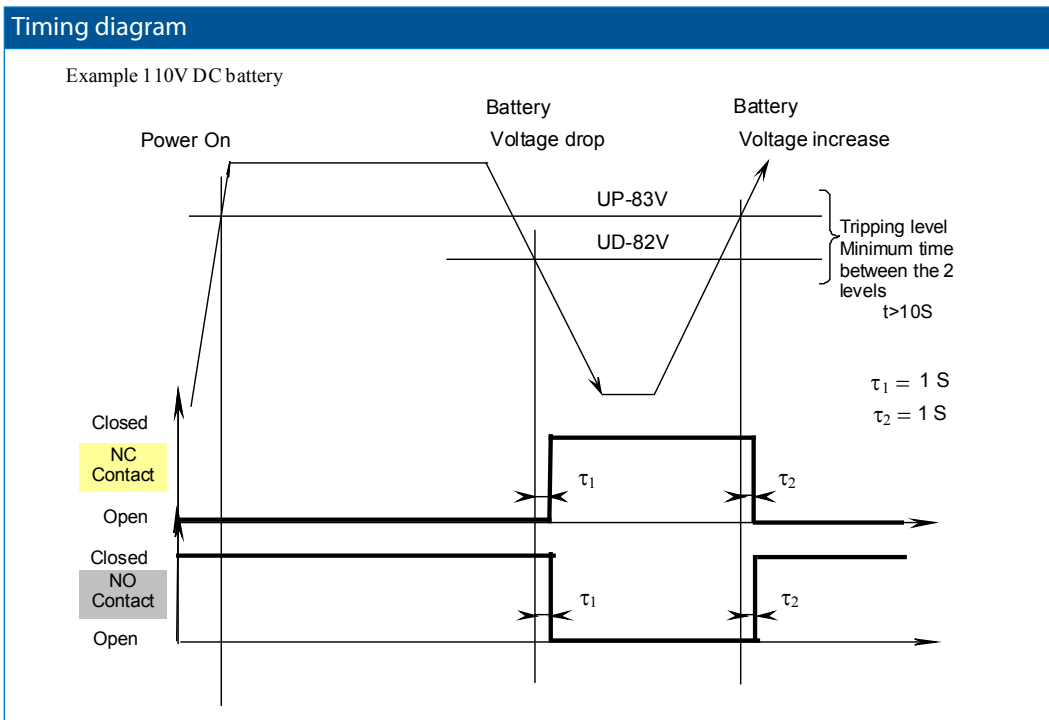

UB 200 relay

Technical specifications

Input data

Keying	U _{nom} (VDC)	U _{operating} (VDC)	Level 1 (drop/increase)
AW	24	16 / 36	18 / 20
BW	36	25 / 48	TBD ⁽¹⁾
TBD ⁽¹⁾	48	33 / 60	TBD ⁽¹⁾
DW	72	48 / 90	55 / 65
EW	110	75 / 138	TBD ⁽¹⁾

(1) to be defined

Electrical characteristics

Operating voltage	24 VDC...110 VDC
Operating current	< 20 mA
Output configuration	2 C/O form Z
Maximum load current	0.2 A
Contact life	0.1 A resistive > 1.10 ⁶ operations 0.1 A L/R = 30 ms > 1.10 ⁶ operations
Dielectric strength	1500 VAC, 1 min between housing and tabs

Time delay characteristics

Time delay on voltage increase	0...20 s (τ1 to be defined)
Time delay on voltage drop	0...20 s (τ2) to be defined

Accuracy repeatability

Voltage level tolerance	± 1 V
-------------------------	-------



UB 200 relay

Technical specifications

Mechanical and environmental specifications


Operating temperature	-40 °C...+85 °C, IP50 (relay on socket)
Vibrations 3 axis	2 g / 10...150 Hz
Shocks	30 g / 11 ms
Operating position	Any attitude
Environment	NF F 20-600
Weight	150 g
Material	Polycarbonat (cover) / Polyester Melamine (base)
Fire and smoke	NF F 16-101/102



UB 200 relay

Technical specifications

Dimensions (mm)

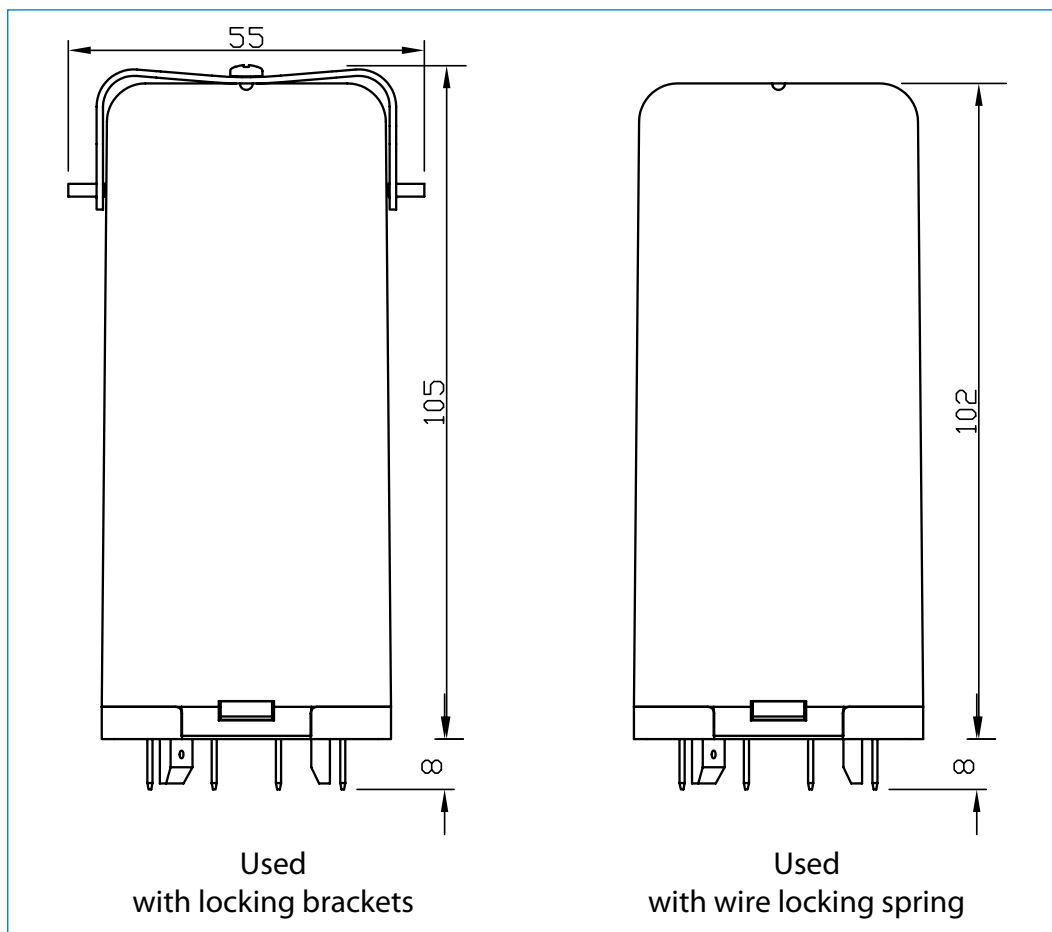

UB 200 relay

Mounting possibilities / sockets



EA 102 B



EA 103 BF



EA 104 B



EA 112 BF

Panel/flush mounting

EA 102 B	Locking bracket (905843), rear connection, double Faston 5 mm
EA 102 BF	Wire locking spring (926853), rear connection, single Faston 5 mm
EA 104 B	Locking bracket (905843), rear connection, single Faston 5 x 0.8 mm
EA 104 BF	Wire locking spring (926853), rear connection, single Faston 5 x 0.8mm
EA 112 BF	Wire locking spring (926853), rear connection, crimp contact

Surface/wall mounting

EA 103 BF*	Wire locking spring (926853), front connection, M3 screw 6.5 mm ring terminals (2,5 mm ²)
EA 105 BF*	Wire locking spring (926853), front connection, single Faston 5 mm









* Mounting possibility on 35 mm rail EN 50022 by adding suffix D to the part number (see socket datasheet)

Note: Keying of relay to socket can be specified by adding the keying letters in the part number. See all details in the related socket datasheet.

UB 200 relay

Spare parts

Spare parts - order part numbers

<p>(1)</p>  <p>LOCKING BRACKET</p> <p>905846</p>	<p>(1)</p>  <p>SCREW FOR BRACKET</p> <p>C927210</p>	<p>(1)</p>  <p>METAL STRAP (2)</p> <p>P928060</p>	<p>(1)</p>  <p>METAL STRAP (4)</p> <p>P928061</p>
<p>(1)</p>  <p>WIRE LOCKING SPRING</p> <p>431906654</p>	<p>(1)</p>  <p>ROUND PLASTIC PLUGS</p> <p>414928005</p>	<p>(2)</p>  <p>HEX. PLASTIC KEYS</p> <p>414905678</p>	<p>(3)</p>  <p>LOCK PINS ASSY 2 SCREWS</p> <p>906364 212903020</p>

(1) Parts only for socket
 (2) Parts for relay and socket
 (3) Parts only for relay



UB 200 relay

Instructions

Installation

Install socket and connect wiring correctly according identification to terminals. Plug relay into socket. Reverse installation into socket not possible due to mechanical blocking by snap-lock.

Don't reverse polarity of coil connection. Relays can be mounted (tightly) next to each other and in any attitude.

Warning! Never use silicon near by relays

Operation

Before operating always apply voltage to coil to check correct operation.

Long term storage may corrode the silver on the relay pins. Just by plugging the relay into the socket, the female bifurcated receivers will automatically clean the corrosion on the pins and guarantee a good connection.

Do not use the relay in places with flammable gas as the arc generated from switching could ignite gasses.

Maintenance

Correct operation of relay can easily be checked as transparent cover gives good visibility on the moving contacts. When the relay doesn't seem to operate correct, please check presence of coil voltage. Use a multimeter. If LED is used, coil presence should be indicated. If coil voltage is present, but the relay doesn't work, a short circuit of suppression diode is possible (The coil connection was reversed). If relay doesn't work after inspection, please replace relay unit by a similar model. Send defective relay back to manufacturer. Normal wear and tear excluded.



UB 200 relay

Ordering scheme

Configuration:



1. Relay model 2. No. of contacts 3. Nominal voltage 4. Keying type 5. Cover type 6. Language (test report)

This example represents a **UB 200 36 BW F 1**.

Description: UB 200 relay, U_{nom} : 36 VDC, keying BW, relay cover for wire locking spring, test report in English

1. Relay model

UB

2. Number of contacts

200 2 C/O contacts

3 & 4. Nominal voltage and keying

24 AW 24 VDC
36 BW 36 VDC
48 xx 48 VDC
72 DW 72 VDC
110 EW 110 VDC
 xx = to be defined

5. Relay cover type

– Relay cover with lock pins
F Relay cover for wire locking spring

6. Language on test report

– French
1 English
2 Spanish





DS-UB 200-V2.0 May 2013



www.morssmitt.com



Mors Smitt France SAS

Tour Rosny 2, Avenue du Général de Gaulle,
F - 93118 Rosny-sous-Bois Cedex, FRANCE
T +33 (0)1 4812 1440, F +33 (0)1 4855 9001
E sales@msrelais.com

Mors Smitt Asia Ltd.

807, Billion Trade Centre, 31 Hung To Road
Kwun Tong, Kowloon, HONG KONG SAR
T +852 2343 5555, F +852 2343 6555
E info@morssmitt.hk

Mors Smitt B.V.

Vrieslantlaan 6, 3526 AA Utrecht,
NETHERLANDS
T +31 (0)30 288 1311, F +31 (0)30 289 8816
E sales@nieaf-smitt.nl

Mors Smitt Technologies Inc.

420 Sackett Point Road
North Haven, CT 06473, USA
T +1 (203) 287 8858, F +1 (888) 287 8852
E mstechnologies@msrelais.com

Mors Smitt UK Ltd.

Doulton Road, Cradley Heath
West Midlands, B64 5QB, UK
T +44 (0)1384 567 755, F +44 (0)1384 567 710
E info@morssmitt.co.uk

(c) Copyright 2013

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract.