

# V92BR socket - Screw terminal, wall mount, Datasheet

## 8 pole



### Description

The V92BR is a surface / wall mount relay socket with extra space for ring tabs. The V92BR socket has one screw terminal per relay contact suitable for two wires up to 2.5 mm<sup>2</sup> and 9 mm ring tabs, so looping/daisy chaining can be done on the socket and no external connector or terminal is needed.

To prevent fault relay placement the socket can be equipped with mechanical keying to accept only designated identical keyed relays.

### Application

The V92BR relay socket is suitable for general industrial applications with a space saving design, where extra space for ring tabs is necessary. Installation and replacement of relays is made easy and cost saving. No maintenance is required for the user.

Suitable for all D8 and KDN relay series.

#### Features

- Surface / wall mount
- Sturdy screw terminals
- Suitable for 9 mm ring tabs
- Suitable for all D8 and KDN relays
- Up to two wires of 2.5 mm<sup>2</sup> per connection terminal
- Positive mechanical keying
- Bifurcated female receiver for tight grip relay pin
- Clear terminal ID

#### Benefits


- Proven reliable
- Long term availability
- Easy to maintain
- Low life cycle cost
- No maintenance

#### Industry compliancy

- EN 60947-5-1 - Electromechanical control circuit devices and switching elements
- IEC 61810 - Electromechanical elementary relays

# V92BR socket


## Technical specifications

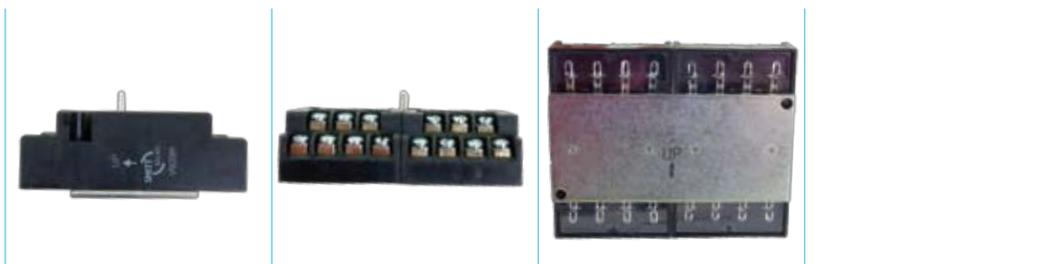

## Technical characteristics

|                                   |   |
|-----------------------------------|---|
| Contact rating                    | 10 A  |
| Dielectric strength               | IEC 60255 / IEC 60571, 2500 V, 50 Hz, 1 min |
| Protecting category               | IEC 60529, IP10                             |
| Mounting                          | Surface / wall mount                        |
| Max. ambient temperature          | 80 °C                                       |
| Weight                            | 322 g                                       |
| Dimensions                        | 80 x 96 x 40 mm                             |
| Wire size                         | 2 x 2.5 mm <sup>2</sup> maximum             |
| Material                          | Polyamide 66, 30% glass                     |
| Socket contacts                   | Screw                                       |
| Max. torque value mounting screws | 1 Nm  |
| Max. torque value terminal screws | 1 Nm  |
| Accessories                       | A104 Key receptacle                         |

## Connection diagram

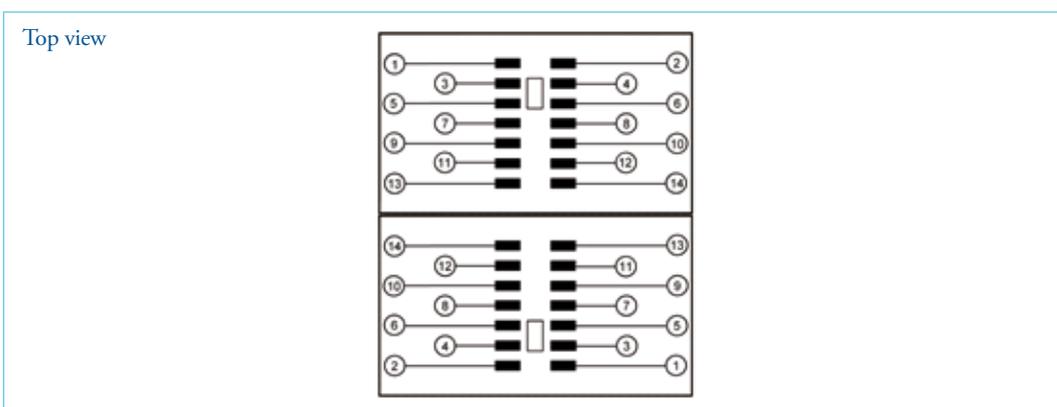



# V92BR socket

## Technical specifications

V22BR Screw terminal relay socket for 4 contact relays (all D-relay series).



For details see datasheet V22BR.



# V92BR socket

## Technical specifications

### Mechanical keying relay and socket (optional)



Function:


- To prevent wrong installation
- To prevent damage to equipment
- To prevent unsafe situations

Using keyed relays and sockets prevents a relay being inserted in a wrong socket. For example it prevents placing a 24 VDC relay in a 110 VDC circuit. Positive discrimination is possible per different function, coil voltage, timing, monitoring, safety and non-safety.


The D-relays socket keying option gives  $8 \times 8 = 64$  possibilities. Upon ordering the customer simply indicates the need for the optional keying. Mors Smitt will assign a code to the relay and fix the pins into the relay. The sockets are supplied with loose key receptacles. Inserting the keys into the socket is very simple and self explaining.

Remark: sockets and relay shown are only examples.

Top view socket

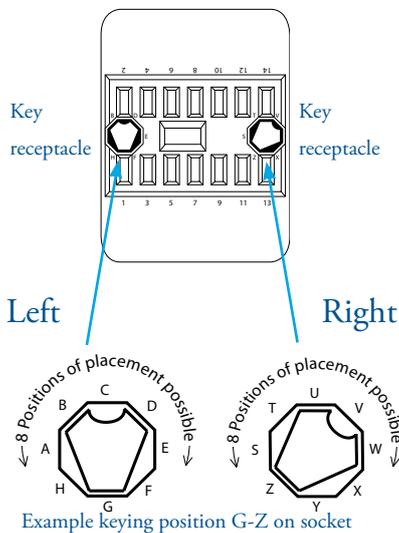

Bottom view relay

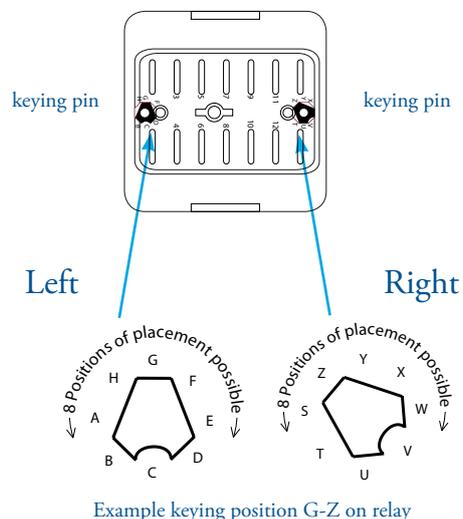

# V92 BR socket

## Technical specifications

### Installation & inspection

#### Installation


Before installation or working on the relay: disconnect the power supply first!

Install socket and connect wiring according to the terminal identification. Plug relay into the socket ensuring there is no gap between the bottom of relay and the socket. Reverse installation into the socket is not possible due to the mechanical blocking snap-lock feature.

No external retaining clip needed as the 'snap-lock' will hold the relay into the socket under all circumstances and mounting directions (according shock & vibration requirements IEC 61373, Category I, Class B, Body mounted).

#### Warning!

- To remove relays from the socket, employ up and down lever movements. Sideway movement may cause damage to the coil wires.

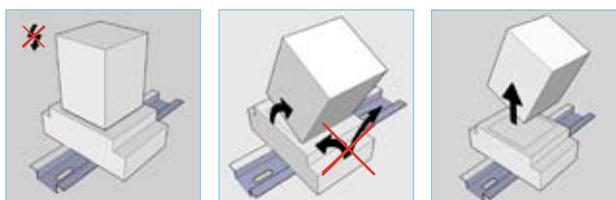

When plugging the relay into the socket, the female bifurcated receivers will automatically cut through the corrosion on the pins and guarantee a reliable connection.

#### Inspection

If the socket does not work after inspection of the correct wiring and relay connection, replace the unit with a similar model.

When returning products for investigation, please provide all information on the RMA form. Send defective products back to the manufacturer for repair or replacement. Normal wear and tear or external causes are excluded from warranty.



# V92BR socket

## Ordering possibilities



V92BR



V22BR



A104

| Article nr | Code  | Description                                      |
|------------|-------|--|
| 338003920  | V92BR | Screw terminal relay socket for 8 contact relays |
| 338000302  | V22BR | Screw terminal relay socket                      |
| 378690100  | A104  | Key receptacle                                   |





Mors Smitt France SAS  
Tour Rosny 2, Avenue du Général de Gaulle,  
F - 93118 Rosny-sous-Bois Cedex, France  
T +33 (0)1 4812 1440, F +33 (0)1 4855 9001  
E [sales@msrelais.com](mailto:sales@msrelais.com)

Mors Smitt Asia Ltd.  
# 807, Billion Trade Centre, 31 Hung To Road  
Kwun Tong, Kowloon, Hong Kong  
T +852 2343 5555, F +852 2343 6555  
E [info@morssmitt.hk](mailto:info@morssmitt.hk)

Mors Smitt B.V.  
Vrieslantlaan 6, 3526 AA Utrecht,  
Netherlands  
T +31 (0)30 288 1311, F +31 (0)30 289 8816  
E [sales@nieaf-smitt.nl](mailto:sales@nieaf-smitt.nl)

Mors Smitt Technologies inc.  
420 Sackett Point Road  
North Haven, Ct 06473, USA  
T +1 (203) 287 8858, F +1 (888) 287 8852  
E [mstechnologies@msrelais.com](mailto:mstechnologies@msrelais.com)

Mors Smitt UK Ltd  
Doulton Road, Cradley Heath  
West Midlands, B64 5QB, UK  
T +44 (0) 1384 567 755, F +44 (0) 1384 567 710  
E [info@morssmitt.co.uk](mailto:info@morssmitt.co.uk)